



# **Wireless Application Protocol**

## **MMS Encapsulation Protocol**

Version 01-June-2001

---

Wireless Application Protocol  
WAP-209-MMSEncapsulation-20010601-a

A list of errata and updates to this document is available from the WAP Forum™ Web site, <http://www.wapforum.org/>, in the form of SIN documents, which are subject to revision or removal without notice.

© 2001, Wireless Application Protocol Forum, Ltd. All Rights Reserved. Terms and conditions of use are available from the WAP Forum™ Web site (<http://www.wapforum.org/what/copyright.htm>).

© 2001, Wireless Application Protocol Forum, Ltd. All rights reserved.

Terms and conditions of use are available from the WAP Forum™ Web site at <http://www.wapforum.org/what/copyright.htm>.

You may use this document or any part of the document for internal or educational purposes only, provided you do not modify, edit or take out of context the information in this document in any manner. You may not use this document in any other manner without the prior written permission of the WAP Forum™. The WAP Forum authorises you to copy this document, provided that you retain all copyright and other proprietary notices contained in the original materials on any copies of the materials and that you comply strictly with these terms. This copyright permission does not constitute an endorsement of the products or services offered by you.

The WAP Forum™ assumes no responsibility for errors or omissions in this document. In no event shall the WAP Forum be liable for any special, indirect or consequential damages or any damages whatsoever arising out of or in connection with the use of this information.

WAP Forum™ members have agreed to use reasonable endeavors to disclose in a timely manner to the WAP Forum the existence of all intellectual property rights (IPR's) essential to the present document. The members do not have an obligation to conduct IPR searches. This information is publicly available to members and non-members of the WAP Forum and may be found on the "WAP IPR Declarations" list at <http://www.wapforum.org/what/ipr.htm>. Essential IPR is available for license on the basis set out in the schedule to the WAP Forum Application Form.

No representations or warranties (whether express or implied) are made by the WAP Forum™ or any WAP Forum member or its affiliates regarding any of the IPR's represented on this list, including but not limited to the accuracy, completeness, validity or relevance of the information or whether or not such rights are essential or non-essential.

This document is available online in PDF format at <http://www.wapforum.org/>.

Known problems associated with this document are published at <http://www.wapforum.org/>.

Comments regarding this document can be submitted to the WAP Forum™ in the manner published at <http://www.wapforum.org/>.

Document History	
WAP-209-MMSEncapsulation-20010601-a	Current

# Contents

<b>1. SCOPE .....</b>	<b>5</b>
<b>2. REFERENCES .....</b>	<b>6</b>
<b>2.1. NORMATIVE REFERENCES .....</b>	<b>6</b>
<b>2.2. INFORMATIVE REFERENCES .....</b>	<b>6</b>
<b>3. TERMINOLOGY AND CONVENTIONS .....</b>	<b>7</b>
<b>3.1. CONVENTIONS .....</b>	<b>7</b>
<b>3.2. DEFINITIONS .....</b>	<b>7</b>
<b>3.3. ABBREVIATIONS .....</b>	<b>7</b>
<b>4. INTRODUCTION .....</b>	<b>9</b>
<b>5. MESSAGE STRUCTURE OVERVIEW .....</b>	<b>10</b>
<b>6. MMS PROTOCOL DATA UNITS AND FIELDS .....</b>	<b>11</b>
<b>6.1. SENDING OF MULTIMEDIA MESSAGE .....</b>	<b>11</b>
6.1.1. Send Request .....	11
6.1.2. Send confirmation .....	13
<b>6.2. MULTIMEDIA MESSAGE NOTIFICATION .....</b>	<b>14</b>
<b>6.3. RETRIEVAL OF MULTIMEDIA MESSAGE .....</b>	<b>16</b>
<b>6.4. DELIVERY ACKNOWLEDGEMENT .....</b>	<b>18</b>
<b>6.5. DELIVERY REPORTING .....</b>	<b>18</b>
<b>6.6. READ REPORTING .....</b>	<b>19</b>
<b>6.7. ERROR CONSIDERATIONS .....</b>	<b>19</b>
6.7.1. Interoperability Considerations with Version Numbering .....	19
6.7.2. Interoperability between MMS Versions with the Same Major Version Number .....	19
6.7.3. Interoperability between MMS Versions with Different Major Version Numbers .....	20
<b>7. BINARY ENCODING OF PROTOCOL DATA UNITS .....</b>	<b>21</b>
<b>7.1. ENCODING RULES .....</b>	<b>21</b>
<b>7.2. HEADER ENCODING .....</b>	<b>22</b>
7.2.1. Bcc field .....	22
7.2.2. Cc field .....	22
7.2.3. Content-Location field .....	22
7.2.4. Content-Type field .....	23
7.2.5. Date field .....	23
7.2.6. Delivery-Report field .....	23
7.2.7. Delivery-Time field .....	23
7.2.8. Delta-seconds-value .....	23
7.2.9. Encoded-string-value .....	23
7.2.10. Expiry field .....	23
7.2.11. From field .....	24
7.2.12. Message-Class field .....	24
7.2.13. Message-ID field .....	24
7.2.14. Message-Type field .....	24
7.2.15. Message-Size field .....	25
7.2.16. MMS-Version field .....	25
7.2.17. Priority field .....	25
7.2.18. Read-Reply field .....	25
7.2.19. Report-Allowed field .....	26
7.2.20. Response-Status field .....	26
7.2.21. Response-Text field .....	27
7.2.22. Sender-Visibility field .....	27
7.2.23. Status field .....	27
7.2.24. Subject field .....	27
7.2.25. To field .....	27

---

7.2.26. Transaction-Id field .....	27
<b>7.3. ASSIGNED NUMBERS .....</b>	<b>28</b>
<b>8. MMS ADDRESSING MODEL .....</b>	<b>30</b>
<b>APPENDIX A. STATIC CONFORMANCE REQUIREMENTS (NORMATIVE) .....</b>	<b>32</b>
<b>APPENDIX B. CHANGE HISTORY (INFORMATIVE) .....</b>	<b>38</b>

# 1. Scope

The Wireless Application Protocol (WAP) is a result of continuous work to define an industry-wide specification for developing applications that operate over wireless communication networks. The scope for the WAP Forum is to define a set of specifications to be used by service applications. The wireless market is growing very quickly, and reaching new customers and services. To enable operators and manufacturers to meet the challenges in advanced services, differentiation and fast/flexible service creation WAP Forum defines a set of protocols in transport, security, transaction, session and application layers. For additional information on the WAP architecture, please refer to “*Wireless Application Protocol Architecture Specification*” [WAPARCH].

Multimedia Messaging Service (MMS) is a system application by which a WAP client is able to provide a messaging operation with a variety of media types. The service is described in terms of actions taken by the WAP MMS Client and its service partner, the MMS Proxy -Relay, a device which operates as a WAP Origin Server for this specialised service.

The service description of the multimedia messaging service can be found in [MMSSERV]. This specification defines the message encapsulation, i.e., the message structure and encodings for the multimedia messaging service.

## 2. References

### 2.1. Normative References

- [CREQ] "Specification of WAP Conformance Requirements", WAP-221-CREQ, WAP Forum™. URL: <http://www.wapforum.org/>
- [RFC2119] "Key words for use in RFCs to Indicate Requirement Levels". S. Bradner. March 1997. URL: <http://www.ietf.org/rfc/rfc2119.txt>
- [RFC2396] "Uniform Resource Identifiers (URI): Generic Syntax", T. Berners-Lee, et al., August 1998. URL: <http://www.ietf.org/rfc/rfc2396.txt>.
- [RFC2045] "Multipurpose Internet Mail Extensions (MIME) Part One: Format of Internet Message Bodies", Freed N., November 1996. URL: <ftp://ftp.isi.edu/in-notes/rfc2045.txt>.
- [RFC2046] "Multipurpose Internet Mail Extensions (MIME) Part Two: Media Types", Freed N., November 1996. URL: <ftp://ftp.isi.edu/in-notes/rfc2046.txt>.
- [RFC2047] "Multipurpose Internet Mail Extensions (MIME) Part Three: Message Header Extensions for Non-ASCII Text", Moore K., November 1996. URL: <ftp://ftp.isi.edu/in-notes/rfc2047.txt>.
- [RFC2234] "Augmented BNF for Syntax Specifications: ABNF", Crocker D., Overell P., November 1997. URL: <ftp://ftp.isi.edu/in-notes/rfc2234.txt>.
- [RFC2387] "The MIME Multipart/related content type", Levinson E., August 1998. URL: <ftp://ftp.isi.edu/in-notes/rfc2387.txt>
- [RFC2392] "Content-ID and Message-ID Uniform Resource Locators", Levinson E., August 1998. URL: <ftp://ftp.isi.edu/in-notes/rfc2392.txt>
- [RFC2616] "Hypertext Transfer Protocol HTTP/1.1", Fielding R., Gettys J., Mogul J., Frystyk H., Masinter L., Leach P., Berners-Lee T., June 1999. URL: <ftp://ftp.isi.edu/in-notes/rfc2616.txt>
- [RFC822] "Standard for the Format of ARPA Internet Text Messages", Crocker D., August 1982. URL: <ftp://ftp.isi.edu/in-notes/rfc822.txt>
- [WAPWSP] "Wireless Application Protocol, Wireless Session Protocol Specification", WAP-203-WSP, WAP Forum™. URL: <http://www.wapforum.org>.

### 2.2. Informative References

- [WAPARCH] "WAP Architecture", WAP-100-Arch, WAP Forum™. URL: <http://www.wapforum.org/>
- [MMSSERV] "Wireless Application Protocol, MMS Client Transactions", WAP-206-MMSCCTR, WAP Forum™. URL: <http://www.wapforum.org>.
- [PPG] "Wireless Application Protocol, Push Proxy Gateway Service Specification", WAP-151-PPG, WAP Forum™. URL: <http://www.wapforum.org>.
- [SMIL] "Synchronized Multimedia Integration Language (SMIL) Boston Specification", W3C, Working Draft SMIL 2.0 September 2000. URI: <http://www.w3.org/TR/smil20/>
- [TS22140] "Multimedia Messaging Service: Service aspects; Stage 1", 3rd Generation Partnership Project TS 22.140 Release 1999. URL: <http://www.3gpp.org/ftp/Specs/>
- [TS23140] "Multimedia Messaging Service: Functional description; Stage 2", 3rd Generation Partnership Project TS 23.140 Release 1999. URL: <http://www.3gpp.org/ftp/Specs/>
- [WML] "Wireless Application Protocol, Wireless Markup Language Specification, Version 1.3", WAP-191-WML, WAP Forum™. URL: <http://www.wapforum.org>.

## 3. Terminology and Conventions

### 3.1. Conventions

The key words “MUST”, “MUST NOT”, “REQUIRED”, “SHALL”, “SHALL NOT”, “SHOULD”, “SHOULD NOT”, “RECOMMENDED”, “MAY”, and “OPTIONAL” in this document are to be interpreted as described in [RFC2119].

All sections and appendixes, except “Scope” and “Introduction”, are normative, unless they are explicitly indicated to be informative.

### 3.2. Definitions

This section introduces a terminology that will be used throughout this document.

#### Multimedia Messaging Service (MMS)

A system application by which a WAP client is able to provide a messaging operation with a variety of media types.

#### MMS Encapsulation

The definition of the protocol data units, the fields and their encodings necessary to send and receive multimedia messages including multimedia objects.

#### MMS Proxy -Relay

A server which provides access to various messaging systems. It may operate as WAP origin server in which case it may be able to utilise features of the WAP system.

#### MMS Client

The MMS service endpoint located on the WAP client device.

#### MMS Terminal

A mobile station (MS, terminal) that implements the MMS Client to provide the MMS service.

#### MMS Originating Terminal

The MMS Terminal which sends a multimedia message.

#### MMS Recipient Terminal

The MMS Terminal which receives a multimedia message.

### 3.3. Abbreviations

For the purposes of this specification the following abbreviations apply.

<b>HTTP</b>	Hypertext Transfer Protocol
<b>IPv4</b>	Internet Protocol version 4

---

<b>IPv6</b>	Internet Protocol version 6
<b>MIME</b>	Multipurpose Internet Mail Extensions
<b>MM</b>	Multimedia Message
<b>MMS</b>	Multimedia Messaging Service
<b>MS</b>	Mobile Station, Terminal
<b>PDU</b>	Protocol Data Unit
<b>PLMN</b>	Public Land Mobile Network
<b>SMIL</b>	Synchronized Multimedia Integration Language
<b>RFC</b>	Request For Comments
<b>URI</b>	Uniform Resource Identifier
<b>WAP</b>	Wireless Application Protocol
<b>WINA</b>	WAP Interim Naming Authority
<b>WML</b>	Wireless Markup Language
<b>WSP</b>	Wireless Session Protocol



## 4. Introduction

This section is informative.

This paper describes the content and encodings of the protocol data units (PDUs) for the multimedia messaging service.

In multimedia messaging service the WAP WSP/HTTP is used to transfer multimedia messages between the terminal (MS) and the MMS Proxy -Relay. The WSP session management and the related capability negotiation mechanisms as well as security functions are out of the scope of this document.

There are basically eight types of PDUs in MMS level:

- Send message to MMS Proxy -Relay(M-Send.req, M-Send.conf)
- Fetch message from MMS Proxy -Relay (WSP/HTTP GET.req, M-Retrieve.conf)
- MMS Notification about new message (M-Notification.ind, M-NotifyResp.ind)
- Delivery Report about sent message (M-Delivery.ind)
- Acknowledgement of message delivery (M-Acknowledge.req)

Logically the PDU consists of headers and a multipart body. The multipart body is present only as a sent multimedia message and a successfully fetched message. Some of the headers originate from standard RFC 822 headers and others are specific to the multimedia messaging.


According to WSP definitions, comma separated lists of header field values are coded as multiple headers with identical name. If the headers are converted from binary encoding to textual format, several header fields with the same name are combined into a comma separated list, and vice versa. The order of the header fields is preserved.

The textual format of the headers is that defined in [RFC822] and [RFC2616]. Binary encoding is similar to WSP header encoding [WAPWSP]. In this specification, values for header fields and parameter names are assigned.

## 5. Message Structure Overview

The multimedia messaging PDUs consists of MMS headers and a message body. The message body may contain any content type, including preassigned content types defined in [WAPWSP]. The MIME multipart [RFC2045-7] is used in email systems and are therefore compatible. The content type of the PDUs is application/vnd.wap.mms-message.

The WSP content type application/vnd.wap.multipart.related content type provides a good example how multimedia content and presentation information can be encapsulated to a single message. Figure 1 depicts the conceptual model and example of the encapsulation.

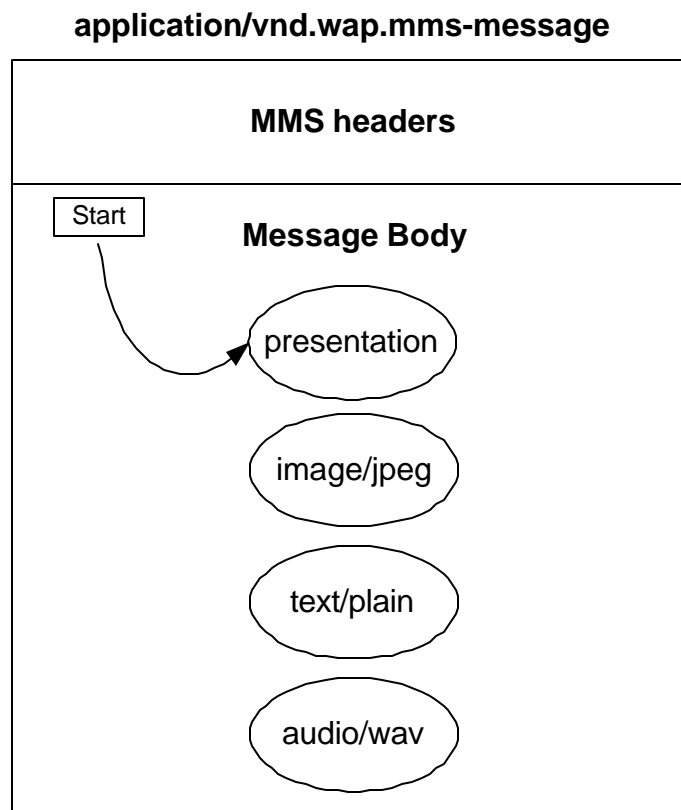

**Figure 1. Model of MMS data encapsulation**

The mms-headers contain MMS-specific information of the PDU. This information contains mainly information how to transfer the multimedia message from originating terminal to the recipient terminal.

In the multimedia messaging use case, the message body consists of multipart/related structure [RFC2387] including multimedia objects, each in separate part, as well as optional presentation part. The order of the parts has no significance. The presentation part contains instructions how the multimedia content should be rendered to the display and speakers etc, on the terminal. There MAY be multiple presentation parts, but one of them MUST be the root part. In case of multipart/related, the root part is pointed from the Start parameter.

If the presentation part does not exist, it is up to the implementation of the terminal how the multimedia content is presented. Examples of the presentation techniques are SMIL [SMIL] and WML [WML].

The message body is used only when the multimedia message is sent or retrieved. All other PDUs contain only the mms-headers part. The message can contain various multimedia parts. Figure 1 shows just one possibility.

All the content types are subject to WINA/IANA registration.

## 6. MMS Protocol Data Units and Fields

The header fields for sending, notification, retrieving, reporting and acknowledging of a multimedia message are described in the Tables 1-7. The names of the fields that do not originate from [RFC822] are preceded by X-Mms-. The MMS Protocol Data Units MAY contain additional Header fields such as found in standard [RFC822] headers which are not explicitly referenced in this document.

### 6.1. Sending of Multimedia Message

The sending of the multimedia message consists of two messages: M-Send.req and M-Send.conf. The transaction identifier is created and used by the sending client and it is unique within the send transaction only.

#### 6.1.1. Send Request

This chapter describes messages sent by the MS to the MMSProxy-Relay, and those headers generated by the sender's MMS Proxy-Relay and added to the headers generated by the client. These headers are used to generate the MMS notification to the recipient, and are delivered with the message body parts to the recipient at retrieval.

In addition to the following tokens described in the table below, it is also possible to provide header extendability using WSP mechanism of encoding of a new unassigned header field name

Name	Content	Comments
X-Mms-Message-Type	Message-type-value = m-send-req	Mandatory. Specifies the transaction type.
X-Mms-Transaction-ID	Transaction-id-value	Mandatory. A unique identifier for the message. This transaction ID identifies the M-Send.req and the corresponding reply only.
X-Mms-MMS-Version	MMS-version-value	Mandatory. The MMS version number. According to this specification, the version is 1.0
Date	Date-value	Optional. Arrival time of the message at MMSProxy-Relay. MMS Proxy-Relay will generate this field when not supplied by terminal.
From	From-value	Mandatory. Address of the message sender. This field MUST be present in a message delivered to a recipient. The sending client MUST send either its address or insert-an-address token. In case of token, the MMS Proxy-Relay MUST insert the correct address of the sender.
To	To-value	Optional <sup>1</sup> .

<sup>1</sup> At least one of these address fields (To, Cc or Bcc) MUST be present.

		Address of the recipient. Addressing is handled in Chapter 8. Any number of address fields allowed.
Cc	Cc-value	Optional <sup>1</sup> . Address of the recipient. Addressing is handled in Chapter 8. Any number of address fields allowed.
Bcc	Bcc-value	Optional <sup>1</sup> . Address of the recipient. Addressing is handled in Chapter 8. Any number of address fields allowed.
Subject	Subject-value	Optional. Subject of the message.
X-Mms -Message-Class	Message-class -value	Optional. Class of the message. Value Auto indicates a message that is automatically generated by the client. If the Message-Class is Auto, the originating terminal SHALL NOT request Delivery-Report or Read-Report. If field is not present, the receiver interprets the message as personal.
X-Mms -Expiry	Expiry-value	Optional, default: maximum. Length of time the message will be stored in MMS Proxy-Relayor time to delete the message. The field has two formats, either absolute or interval.
X-Mms -Delivery-Time	Delivery-time-value	Optional: default: immediate. Time of desired delivery. Indicates the earliest possible delivery of the message to the recipient. The field has two formats, either absolute or interval.
X-Mms -Priority	Priority-value	Optional. Default: Normal. Priority of the message for the recipient.
X-Mms -Sender-Visibility	Sender-visibility-value	Optional. Default: show address/phone number of the sender to the recipient unless the sender has a secret number/address. Hide = don't show any address. Show = show even secret address.
X-Mms -Delivery -Report	Delivery-report-value	Optional. Default determined when service is ordered. Specifies whether the user wants a delivery report from each recipient. When Message-Class is Auto, the field SHALL always be present and the value SHALL be No.

X-Mms-Read-Reply	Read-reply-value	Optional. Specifies whether the user wants a read report from each recipient as a new message. When Message-Class is Auto, the field SHALL always be present and the value SHALL be No.
Content-Type	Content-type-value	Mandatory. The content type of the message.

**Table 1. Headers of M-Send.req message**

Application-specific headers in M-Send.req provide technology that allows the use of application-specific extensions for multimedia messaging service which allows, e.g., the use of additional RFC-822 headers.

The message body follows the headers.

When the content type application/vnd.wap.multipart.related [RFC2387] is used and if the Start parameter in the related structure is present, it **MUST** point to the presentation part of the multimedia message. If the Start parameter is not present, the presentation part, if present at all, **MUST** be the first part in the multipart structure.

### 6.1.2. Send confirmation

When the MMS Proxy -Relay has received the Send request, it sends a response message back to the MS indicating the status of the operation. The response message contains a the mms-headers only.

Name	Content	Comments
X-Mms-Message-Type	Message-type-value = m-send-conf	Mandatory. Identifies the message type.
X-Mms-Transaction-ID	Transaction-id-value	Mandatory. This transaction ID identifies the M-Send.conf and the corresponding request only.
X-Mms-MMS-Version	MMS-version-value	Mandatory. The MMS version number. According to this specification, the version is 1.0
X-Mms-Response-Status	Response-status-value	Mandatory. MMS specific status.
X-Mms-Response-Text	Response-text-value	Optional. Description which qualifies the response status value.
Message-ID	Message-ID-value	Optional. This is a unique reference assigned to message. This ID SHALL always be present when the MMS Proxy - Relay accepted the message. The ID enables a client to match delivery reports with previously sent messages.

**Table 2. M-Send.conf message.**

The MMS Proxy -Relay MUST always assign a message ID to the message when successfully received for delivery. The message ID shall be globally unique according to the needs of the MMS Proxy -Relay that receives the multimedia message for delivery.

## 6.2. Multimedia Message Notification

MMS Notifications inform the MS about the contents a received message. The MMS Notification message consists only of MMS headers. No other parts are present. The purpose of the notification is to allow the client to automatically fetch a MM from the location indicated in the notification.

The transaction identifier is created by the MMS Proxy -Relay and it is unique up to the following M-NotifyResp only.

If the MMS Client requests deferred delivery with M-NotifyResp, the MMS Proxy -Relay MAY create a new transaction identifier.

Name	Content	Comments
X-Mms-Message-Type	Message-type-value = m-notification-ind	Mandatory. Specifies the transaction type.
X-Mms-Transaction-ID	Transaction-id-value	Mandatory. Identifies the notification and the subsequent transaction that is closed by the following M-NotifyResp.
X-Mms-MMS-Version	MMS-version-value	Mandatory. The MMS version number. According to this specification, the version is 1.0.
From	From-value	Optional. Address of the sender. If hiding the address of the sender from the recipient is supported, the MMS Proxy-Relay will not add this field to a message header.
Subject	Subject-value	Optional. Subject of the message.
X-Mms-Message-Class	Message-class-value	Mandatory. Class of the message.
X-Mms-Message-Size	Message-size-value	Mandatory. Full size of message in octets.
X-Mms-Expiry	Expiry-value	Mandatory. Length of time the message will be available. The field has only one format, interval.
X-Mms-Content-Location	Content-location-value	Mandatory. This field defines the location of the message.

**Table 3. M-Notification.ind message.**

The standard URI format SHALL be used [RFC2396], for example:

<http://mmsc/message-id>

The confirmation of the notification is presented in Table 4. The purpose of the confirmation is to acknowledge the transaction to the MMSProxy-Relay.

Name	Content	Comments
X-Mms-Message-Type	Message-type-value = m-notifyresp-ind	Mandatory. Identifies the message type.
X-Mms-Transaction-ID	Transaction-id-value	Mandatory. Identifies the transaction started by M-Notification.
X-Mms-MMS-Version	MMS-version-value	Mandatory. The MMS version number. According to this specification, the version is 1.0
X-Mms-Status	Status-value	Mandatory. Message status. The status Retrieved SHALL be used only after successful retrieval of multimedia message.
X-Mms-Report-Allowed	Report-allowed-value	Optional. Default: Yes. Sending of delivery report allowed to the user or not.

Table 4. M-NotifyResp.ind message.

## 6.3. Retrieval Of Multimedia Message

A client SHALL retrieve messages by sending a WSP/HTTP GET request to the MMS Proxy-Relay containing a URI to the received message.

When successful, the response to the retrieve request will contain headers and the body of the incoming message.

Name	Content	Comments
X-Mms-Message-Type	Message-type-value = m-retrieve-conf	Mandatory. Specifies the message type.
X-Mms-Transaction-ID	Transaction-id-value	Optional. Identifies either the transaction that has been started by M-Notification without M-NotifResp or new transaction when deferred delivery was requested. The new transaction ID is optional.
X-Mms-MMS-Version	MMS-version-value	Mandatory. The MMS version number. According to this specification, the version is 1.0.
Message-ID	Message-ID-value	Optional. This is a unique reference assigned to message. This ID SHALL always be present when the originator client requested a read reply. The ID enables a client to match read reports with



		previously sent messages.
Date	Date-value	Mandatory. Sending date and time.
From	From-value	Optional. Address of the sender. If hiding the address of the sender from the recipient is supported, the MMS Proxy-Relay will not add this field to a message header.
To	To-value	Optional. Address of the recipient. Addressing will be handled in Chapter 8. Any number of address fields allowed.
Cc	Cc-value	Optional. Address of the recipient. Addressing will be handled in Chapter 8. Any number of address fields allowed.
Subject	Subject-value	Optional. Message subject
X-Mms-Message-Class	Message-class-value	Optional. Message class. If field is not present, the receiver interprets the message as personal.
X-Mms-Priority	Priority-value	Optional. Default: Normal Priority of the message.
X-Mms-Delivery-Report	Delivery-report-value	Optional. Default: No. Specifies whether the user wants a delivery report from each recipient.
X-Mms-Read-Reply	Read-reply-value	Optional. Default: No. Specifies whether the user wants a read report from each recipient as a new message.
Content-Type	Content-type-value	Mandatory. The content type of the message.

**Table 5. Headers of M-Retrieve.conf message.**

Application-specific headers in M-Retrieve.conf provide technology that allows the use of application-specific extensions for multimedia messaging service which allows, e.g., the use of additional RFC-822 headers.

The message body follows the headers.

When the content type application/vnd.wap.multipart.related [RFC2387] is used and if the Start parameter in the related structure is present, the client SHOULD expect it to point to the presentation part of the multimedia message.

## 6.4. Delivery Acknowledgement

A MMS Acknowledge message confirms the delivery of the message from the receiving terminal to the MMS Proxy - Relay.

Name	Content	Comments
X-Mms-Message-Type	Message-type-value = m-acknowledge-ind	Mandatory. Identifies the transaction type.
X-Mms-Transaction-ID	Transaction-id-value	Mandatory. This is the transaction number that originates from immediately previous M-Retrieve operation.
X-Mms-MMS-Version	MMS-version-value	Mandatory. The MMS version number. According to this specification, the version is 1.0
X-Mms-Report-Allowed	Report-allowed-value	Optional. Default: Yes. Sending of delivery report allowed to the user.

**Table 6. M-Acknowledge.ind message.**

## 6.5. Delivery Reporting

A MMS Delivery Report MUST be sent from the MMS Proxy -Relay to the originating MS when the originator has requested a delivery report and the recipient has not explicitly requested for denial of the report. As for example, the recipient can request for denial of the Delivery Report by using the X-Mms-Report-Allowed field of M-Acknowledge.ind or M-NotifyResp.ind message. There will be a separate delivery report from each recipient. There is no response message to the delivery report.

Name	Content	Comments
X-Mms-Message-Type	Message-type-value = m-delivery-ind	Mandatory. Identifies the PDU type.
X-Mms-MMS-Version	MMS-version-value	Mandatory. The MMS version number. According to this specification, the version is 1.0
Message-ID	Message-ID-value	Mandatory. Identifier of the message. From Send request, connects delivery report to sent message in MS.
To	To-value	Mandatory. Needed for reporting in case of point-to-multipoint message.
Date	Date-value	Mandatory. Date and time the message was handled (fetched, expired, etc.) by the recipient or MMSProxy -Relay.
X-Mms-Status	Status-value	Mandatory. The status of the message.

Table 7. M-Delivery.ind message.

## 6.6. Read Reporting

When the originating terminal requested the Read-Reply in the multimedia message, the recipient terminal MAY send a new multimedia message back to the originating terminal when the user has read the multimedia message. The content of the multimedia message is a terminal implementation issue. The read-reply multimedia message MUST have the Message-Class as Auto in the message.

The MMS Proxy -Relay MUST deliver the read-reply message as ordinary multimedia message.

When the originating terminal receives the Read-Reply, it SHALL NOT create delivery report or read-reply message.

## 6.7. Error Considerations

### 6.7.1. Interoperability Considerations with Version Numbering

The MMS version number is divided into two parts: major version number and minor version number. MMS versions with only minor version number differences SHALL provide full backward compatibility. MMS versions with major version number differences SHALL NOT provide backward compatibility.

### 6.7.2. Interoperability between MMS Versions with the Same Major Version Number

The following rules SHALL be followed between different MMS versions having the same major version number but different minor version number.

When a terminal or proxy -relay receives a PDU containing a particular minor version number it MAY respond with a PDU containing a different minor version number.

Unless a specific behaviour has been defined, the receiving terminal or proxy -relay SHALL ignore all unrecognised fields and recognised fields with unrecognised values.

The receiving proxy -relay SHALL respond to any unknown PDU with M-Send.conf with status value 'Error-unsupported-message'.

The receiving terminal SHALL respond to any unknown PDU with M-NotifyResp.ind with status value 'Unrecognised'.

### 6.7.3. Interoperability between MMS Versions with Different Major Version Numbers

The following rules SHALL be followed between specifications with different major version numbers.

The receiving proxy -relay SHALL respond to any PDU having major version number which it does not support with MMS 1.0 M-Send.conf containing status value 'Error-unsupported-message'.

The receiving terminal SHALL respond to any PDU having major version number which it does not support with MMS 1.0 M-NotifyResp.ind containing status value 'Unrecognised'.

If the receiving terminal or proxy -relay supports multiple major versions including the version number of the received PDU, it MUST respond to the received PDU with a PDU from the same major version.

All major MMS versions MUST support MMS 1.0 M-Send.conf and MMS 1.0 M-NotifyResp.ind.

## 7. Binary Encoding of Protocol Data Units

The basic encoding mechanism for multimedia messages originates from WSP specification [WAPWSP], because this is very tight encoding intended to optimize amount of data transmitted over the air.

The encoded MMS messages are stored to the Data field of the Post, Reply and Push PDUs [WAPWSP]. Thus, the MMS messages are NOT encoded into WSP headers using WSP codepage technique.

If user-defined headers are used, the mechanism described in Chapter 7.1 (Application-header) MUST be used.

In the encoding of the fields, the order of the fields is not significant, except that Message-Type, Transaction-ID and MMS-Version MUST be at the beginning of the message headers, in that order, and the content type MUST be the last header, followed by message body.

The definitions for non-terminals not found in this document MUST follow the definitions in [WAPWSP].

Note: The term "non-terminal" comes from the same context as described in [RFC2234].

In the encoding of the message body, the binary encoding specified in [WAPWSP] SHOULD be used whenever available. Otherwise, text encoding is used.

### 7.1. Encoding Rules

The following rules are used to encode headers:

Header = MMS-header | Application-header

MMS-header = MMS-field-name MMS-value

Application-header = Token-text Application-specific-value

Token-text = Text -string

MMS-field-name = Short-integer

Application-specific-value = Text -string

MMS-value =

Bcc-value |  
Cc-value |  
Content-location-value |  
Content-type-value |  
Date-value |  
Delivery-report-value |  
Delivery-time-value |  
Delta-seconds-value |  
Expiry-value |  
From-value |

Message-class-value |  
Message-ID-value |  
Message-type-value |  
Message-size-value |  
MMS-version-value |  
Priority-value |  
Read-reply-value |  
Report-allowed-value |  
Response-status-value |  
Response-text-value |  
Sender-visibility-value |  
Status-value |  
Subject-value |  
To-value |  
Transaction-id-value

## 7.2. Header Encoding

### 7.2.1. Bcc field

Bcc-value = Encoded-string-value

See Chapter 8 for addressing model.

### 7.2.2. Cc field

Cc-value = Encoded-string-value

See Chapter 8 for addressing model.

### 7.2.3. Content-Location field

Content-location-value = Uri-value

Uri-value = Text-string

URI value SHOULD be encoded per [RFC2616], but service user MAY use a different format.

## 7.2.4. Content-Type field

The Content-Type field is encoded as Content-type-value defined in [WAPWSP 8.4.2.24]. Preassigned content-types can be found in [WAPWSP Appendix A, Table 40]. The use of start-parameter in case of multipart/related is define in [RFC2387] and SHOULD be encoded according to [WAPWSP].

## 7.2.5. Date field

Date-value = Long-integer

In seconds from 1970-01-01, 00:00:00 GMT.

## 7.2.6. Delivery-Report field

Delivery-report-value = Yes | No

Yes = <Octet 128>

No = <Octet 129>

## 7.2.7. Delivery-Time field

Delivery-time-value = Value-length (Absolute-token Date-value | Relative-token Delta-seconds-value)

Absolute-token = <Octet 128>

Relative-token = <Octet 129>

## 7.2.8. Delta-seconds-value

Delta-seconds-value = Long-integer

## 7.2.9. Encoded-string-value

Encoded-string-value = Text -string | Value-length Char-set Text -string

The Char-set values are registered by IANA as MIBEnum value.

## 7.2.10. Expiry field

Expiry-value = Value-length (Absolute-token Date-value | Relative-token Delta-seconds-value)

Absolute-token = <Octet 128>

Relative-token = <Octet 129>

### 7.2.11. From field

From-value = Value-length (Address-present-token Encoded-string-value | Insert-address-token )

Address-present-token = <Octet 128>

Insert-address-token = <Octet 129>

See Chapter 8 for addressing model.

### 7.2.12. Message-Class field

Message-class-value = Class-identifier | Text-string

Class-identifier = Personal | Advertisement | Informational | Auto

Personal = <Octet 128>

Advertisement = <Octet 129>

Informational = <Octet 130>

Auto = <Octet 131>

The token-text is an extension method to the message class.

### 7.2.13. Message-ID field

Message-ID-value = Text -string

Encoded as in email address as per [RFC822]. The characters "<" and ">" are not included.

### 7.2.14. Message-Type field

Message-type-value = m-send-req | m-send-conf | m-notification-ind | m-notifyresp-ind | m-retrieve-conf | m-acknowledge-ind | m-delivery-ind

m-send-req = <Octet 128>



m-send-conf = <Octet 129>

m-notification-ind = <Octet 130>

m-notifyresp-ind = <Octet 131>

m-retrieve-conf = <Octet 132>

m-acknowledge-ind = <Octet 133>

m-delivery-ind = <Octet 134>

Unknown message types will be discarded.

## 7.2.15. Message-Size field

Message-size-value = Long-integer

Message size is in bytes.

## 7.2.16. MMS-Version field

MMS-version-value = Short-integer

The three most significant bits of the Short-integer are interpreted to encode a major version number in the range 1-7, and the four least significant bits contain a minor version number in the range 0-14. If there is only a major version number, this is encoded by placing the value 15 in the four least significant bits [WAPWSP].

## 7.2.17. Priority field

Priority-value = Low | Normal | High

Low = <Octet 128>

Normal = <Octet 129>

High = <Octet 130>

## 7.2.18. Read-Reply field

Read-reply-value = Yes | No

Yes = <Octet 128>

No = <Octet 129>

## 7.2.19. Report-Allowed field

Report-allowed-value = Yes | No

Yes = <Octet 128>

No = <Octet 129>

## 7.2.20. Response-Status field

Response-status-value =                      Ok |  
   Error-unspecified |  
   Error-service-denied |  
   Error-message-format-corrupt |  
   Error-sending-address-unresolved |  
   Error-message-not-found |  
   Error-network-problem |  
   Error-content-not-accepted |  
   Error-unsupported-message

Ok = <Octet 128>

Error-unspecified = <Octet 129>

Error- service-denied = <Octet 130>

Error-message-format-corrupt = <Octet 131>

Error-sending-address-unresolved = <Octet 132>

Error-message-not-found = <Octet 133>

Error-network-problem = <Octet 134>

Error- content-not-accepted = <Octet 135>

Error-unsupported-message = <Octet 136>

Any other values SHALL NOT be used. They are reserved for future use. The value Error-unsupported-message is reserved for version management purpose only.

### 7.2.21. Response-Text field

Response-text-value = Encoded-string-value

### 7.2.22. Sender-Visibility field

Sender-visibility-value = Hide | Show

Hide = <Octet 128>

Show = <Octet 129>

### 7.2.23. Status field

Status-value = Expired | Retrieved | Rejected | Deferred | Unrecognised

Expired = <Octet 128>

Retrieved = <Octet 129>

Rejected = <Octet 130>

Deferred = <Octet 131>

Unrecognised = <Octet 132>

The value Unrecognized is reserved for version management purpose only.

### 7.2.24. Subject field

Subject-value = Encoded-string-value

### 7.2.25. To field

To-value = Encoded-string-value

See Chapter 8 for addressing model.

### 7.2.26. Transaction-Id field

Transaction-id-value = Text-string

## 7.3. Assigned Numbers

The Table 8 contains the field name assignments.

Name	Assigned Number	Notes
Bcc	0x01	
Cc	0x02	
Content-Location	0x03	
Content-Type	0x04	
Date	0x05	
Delivery-Report	0x06	
Delivery-Time	0x07	
Expiry	0x08	
From	0x09	
Message-Class	0x0A	
Message-ID	0x0B	
Message-Type	0x0C	
MMS- Version	0x0D	
Message-Size	0x0E	
Priority	0x0F	
Read-Reply	0x10	
Report-Allowed	0x11	
Response-Status	0x12	
Response-Text	0x13	
Sender-Visibility	0x14	
Status	0x15	
Subject	0x16	
To	0x17	
Transaction-Id	0x18	

**Table 8. Field Name Assignments**

The Table 9 contains the assignments of the necessary content types.

---

Name	Assigned Number
Push Application-ID	4
Application/vnd.wap.mms -message	Subject to IANA registration

**Table 9. Content Type Assignments**

## 8. MMS Addressing Model

The MMS addressing model contains two addresses: the address of the MMS Proxy-Relay and the address of the recipient user and terminal. The address of the MMS Proxy-Relay shall be the URI of MMS Proxy-Relay given by the MMS service provider. Thus, the URI needs to be configurable in the terminal.

A notation for the address of the recipient user in the terminal needs to be defined. The addressing model allows only single user in the terminal, thus combining the address of the terminal and the user. WAP Push Drafting Committee has solved this issue by using ABNF [RFC2234] notation for defining the address type in the WAP Push Proxy Gateway [PPG] specification. The text below is copied from the PPG specification and edited for usage in this specification.

The external representation of addresses processed by the MMS Proxy-Relay is defined using ABNF. The format is compatible with Internet e-mail addresses [RFC822]. The MMS Proxy-Relay **MUST** be able to parse this address format, and it **MUST** be able to determine whether it supports the specified address type or not.

```
address = ( e-mail / device-address )
```

```
e-mail = "Joe User <joe@user.org>" ; corresponding syntax defined in RFC822
      ; per header field
```

```
device-address = ( global-phone-number "/"TYPE=PLMN" )
      / ( ipv4 "/"TYPE=IPv4" )
      / ( ipv6 "/"TYPE=IPv6" )
      / ( escaped-value "/"TYPE=" address-type )
```

```
address-type = 1*address-char
```

```
; A network bearer address type identifier registered with WINA
```

```
address-char = ( ALPHA / DIGIT / "_" )
```

```
value = 1*( %x20-2E / %x30-3C / %x3E-7E )
```

```
escaped-value = 1*( safe-char )
```

```
; the actual value escaped to use only safe characters by replacing
```

```
; any unsafe-octet with its hex-escape
```

```
safe-char = ALPHA / DIGIT / "+" / "-" / "." / "%" / "_"
```

```
unsafe-octet = %x00-2A / %x2C / %x2F / %x3A-40 / %x5B-60 / %x7B-FF
```

```
hex-escape = "%" 2HEXDIG ; value of octet as hexadecimal value
```

```
global-phone-number = ["+"] 1*( DIGIT , written-sep )
```

```
written-sep = ("-" / ".")
```

```
ipv4 = 1*3DIGIT 3( "." 1*3DIGIT ) ; IPv4 address value
```

```
ipv6 = 4HEXDIG 7( ":" 4HEXDIG ) ; IPv6 address per RFC 2373
```

Each value of a user-defined-identifier is a sequence of arbitrary octets. They can be safely embedded in this address syntax only by escaping potentially offending values. The conversion to escaped-value is done by replacing each instance of unsafe-octet by a hex-escape which encodes the numeric value of the octet.

Some examples of the mechanism:

To: 0401234567/TYPE=PLMN

To: +358501234567/TYPE=PLMN

To: Joe User <joe@user.org>

To: FEDC:BA98:7654:3210:FEDC:BA98:7654:3210/TYPE=IPv6

To: 195.153.199.30/TYPE=IPv4

Addresses using the /TYPE format SHOULD NOT contain anything else than what is specified in the examples. E-mail addresses can use the field as it is allowed by RFC822 specification.

The terminal MUST support at least one of the addressing methods. The addressing model may be expanded later to cover other formats of addresses, such as URI-based addressing [RFC2396].

## Appendix A. Static Conformance Requirements (Normative)

Static Conformance Requirement is presented as a set of tables below. The format, contents and syntax of the tables are mandated by [CREQ].

### A.1 MMS Client

#### A.1.1 General Message Structure

Item	Function	Reference	Status	Requirement
MMSE-C-1	Support for application/vnd.wap.mms - message	5.1	Mandatory	
MMSE-C-2	Support for MMS presentation part in multipart structure	5.1	Optional	
MMSE-C-3	Sending additional headers	5.1	Optional	
MMSE-C-4	Functionality for additional headers	6.1.1	Optional	MMSE-C-3
MMSE-C-5	Support of presentation without presentation part	5.1	Optional	
MMSE-C-6	Support for text/plain multimedia objects	5.1	Mandatory	
MMSE-C-7	Support for other multimedia objects than text	5.1	Optional	

**Table 10. Static Conformance Requirement for general message structure, originating terminal**

Item	Function	Reference	Status	Requirement
MMSE-C-8	Support for application/vnd.wap.mms - message	5.1	Mandatory	
MMSE-C-9	Support for MMS presentation part in multipart structure	5.1	Optional	
MMSE-C-10	Recognizing additional headers	6.1.1	Mandatory	
MMSE-C-11	Functionality for additional headers	6.1.1	Optional	MMSE-C-10
MMSE-C-12	Support of presentation without presentation part	5.1	Mandatory	
MMSE-C-13	Support for text/plain multimedia objects	5.1	Mandatory	
MMSE-C-14	Support for other multimedia objects than text	5.1	Optional	



Table 11. Static Conformance Requirement for general message structure, recipient terminal

## A.1.2 Sending of Multimedia Message

Item	Function	Reference	Status	Requirement
MMSE-C-15	Message-Type field	Table 1,2	Mandatory	
MMSE-C-16	Transaction-ID field	Table 1,2	Mandatory	
MMSE-C-17	MMS- Version field	Table 1,2	Mandatory	
MMSE-C-18	Date field	Table 1	Optional	
MMSE-C-19	From field	Table 1	Mandatory	
MMSE-C-20	To field	Table 1	Optional	
MMSE-C-21	Cc field	Table 1	Optional	
MMSE-C-22	Bcc field	Table 1	Optional	
MMSE-C-23	Support for at least one To, Cc or Bcc field	Table 1	Mandatory	MMSE-C-20 OR MMSE-C-21 OR MMSE-C-22
MMSE-C-24	Subject field	Table 1	Optional	
MMSE-C-25	Message-Class field	Table 1	Optional	
MMSE-C-26	Expiry field	Table 1	Optional	
MMSE-C-27	Delivery-Time field	Table 1	Optional	
MMSE-C-28	Priority field	Table 1	Optional	
MMSE-C-29	Sender-Visibility field	Table 1	Optional	
MMSE-C-30	Delivery-Report field	Table 1	Optional	
MMSE-C-31	Read-Reply field	Table 1	Optional	

MMSE-C-32	Content-Type field	Table 1	Mandatory	
MMSE-C-33	Response-Status field	Table 2	Mandatory	
MMSE-C-34	Response-Text field	Table 2	Optional	
MMSE-C-35	In the case of application/vnd.wap.multipart.related the presentation is the root part of the aggregate document.	6.1.1	Mandatory	
MMSE-C-36	Message-ID field in case of successful delivery to MMS Proxy -Relay	Table 2	Mandatory	

**Table 12. Static Conformance Requirement for sent multimedia message and corresponding reply.**

### A.1.3 MMS Notification

Item	Function	Reference	Status	Requirement
MMSE-C-37	Message-Type field	Table 3,4	Mandatory	
MMSE-C-38	Transaction-ID field	Table 3,4	Mandatory	
MMSE-C-39	MMS- Version field	Table 3,4	Mandatory	
MMSE-C-40	From field	Table 3	Optional	
MMSE-C-41	Subject field	Table 3	Optional	
MMSE-C-42	Message-Class field	Table 3	Mandatory	
MMSE-C-43	Message-Size field	Table 3	Mandatory	
MMSE-C-44	Expiry field	Table 3	Mandatory	
MMSE-C-45	Content-Location field	Table 3	Mandatory	
MMSE-C-46	Status field	Table 4	Mandatory	
MMSE-C-47	Report-Allowed field	Table 4	Optional	

**Table 13. Static Conformance Requirement for received MMS notification and corresponding reply.**

## A.1.4 Retrieval of Multimedia Message

Item	Function	Reference	Status	Requirement
MMSE-C-48	Message-Type field	Table 5	Mandatory	
MMSE-C-49	Transaction-ID field	Table 5	Optional	
MMSE-C-50	Message-ID field	Table 5	Optional	
MMSE-C-51	Message-ID field present when Read-Reply value is Yes	Table 5	Optional	MMSE-C-50 AND MMSE-C-63
MMSE-C-52	Support the functionality of Transaction-ID field when present	Table 5	Mandatory	
MMSE-C-53	MMS-Version field	Table 5	Mandatory	
MMSE-C-54	Date field	Table 5	Mandatory	
MMSE-C-55	From field	Table 5	Mandatory	
MMSE-C-56	To field	Table 5	Optional	
MMSE-C-57	Cc field	Table 5	Optional	
MMSE-C-58	Support for either one To or Cc field	Table 5	Mandatory	MMSE-C-56 OR MMSE-C-57
MMSE-C-59	Subject field	Table 5	Optional <sup>2</sup>	
MMSE-C-60	Message-Class field	Table 5	Optional <sup>2</sup>	
MMSE-C-61	Priority field	Table 5	Optional <sup>2</sup>	
MMSE-C-62	Delivery-Report field	Table 5	Optional <sup>2</sup>	
MMSE-C-63	Read-Reply field	Table 5	Optional <sup>2</sup>	

<sup>2</sup> The recipient MS MUST recognise the field but need not provide additional functionality.

MMSE-C-64	Content-Type field	Table 5	Optional <sup>2</sup>	
MMSE-C-65	Report-Allowed field	Table 6	Optional <sup>2</sup>	
MMSE-C-66	Support for recognition of read-reply message	Table 5	Optional	MMSE-C-60

**Table 14. Static Conformance Requirement for received multimedia message and the corresponding reply.**

### A.1.5 Acknowledge and Delivery Report

Item	Function	Reference	Status	Requirement
MMSE-C-67	Message-Type field	Tables 6,7	Mandatory	
MMSE-C-68	Transaction-ID field	Tables 6	Mandatory	
MMSE-C-69	MMS-Version field	Tables 6,7	Mandatory	
MMSE-C-70	Report-Allowed field	Table 6	Optional	
MMSE-C-74	Message-ID field	Table 7	Mandatory	
MMSE-C-75	To field	Table 7	Mandatory	
MMSE-C-76	Date field	Table 7	Mandatory	
MMSE-C-77	Status field	Table 7	Mandatory	

**Table 15. Static Conformance Requirement for received delivery report.**

### A.2 MMS Proxy-Relay

Item	Function	Reference	Status	Requirement
MMSE-S-78	Reception of multimedia message	5.1	Mandatory	
MMSE-S-79	Sending of MMS notification	5.1	Mandatory	
MMSE-S-80	Delivery of multimedia message	5.1	Mandatory	

MMSE-S-81	Creation and delivery of delivery report upon user request	6.5	Mandatory	
MMSE-S-82	Delivery of read-reply multimedia message	6.6	Mandatory	
MMSE-S-83	Inserting current date to multimedia message being delivered	6.1.1	Mandatory	
MMSE-S-84	Inserting correct address when insert-address-token present	6.1.1	Mandatory	
MMSE-S-85	Support for removal of From field in notification & retrieved message when user requested hiding of source	6.2, 6.3	Optional	
MMSE-S-86	Support for adding Message-Class field to MMS notification when not sent by terminal	6.2	Mandatory	
MMSE-S-87	Support for user-requested time-of-expiration for the message	6.1.1	Optional	
MMSE-S-88	Support for deferred delivery when user requested with Delivery-Time field	6.1.1	Optional	
MMSE-S-89	Support for expedited delivery requested by priority field	6.1.1	Optional	

Table 16. Static Conformance Requirement for MMS Proxy-Relay.

### A.3 Character Sets

Item	Function	Reference	Status	Requirement
MMSE-90	Unicode UTF-8 encoding	7.2.9	Optional	
MMSE-91	Unicode UTF-16 encoding	7.2.9	Optional	
MMSE-92	ISO 10646-1 UCS-2 encoding	7.2.9	Optional	
MMSE-93	ISO 10646-1 UCS-4 encoding	7.2.9	Optional	
MMSE-94	Other character encoding	7.2.9	Optional	

Table 17. Static Conformance Requirement for character sets.

## Appendix B. Change History (Informative)

Type of Change	Date	Section	Description
WAP-209-MMSEncapsulation-20000217-d	17-Feb-2000		The final draft of this document for Proposed voting.
Proposed version	14-Sep-2000		Approved as a Proposed version
WAP-209_100-MMSEncapsulation-20000914-p	30-Sep-2000	Overall	Proposed SCD which fixes a couple of bugs and editorial mistakes
WAP-209_100-MMSEncapsulation-20010418-p	18-Apr-2001	Overall	Proposed SCD which fixes yet other bugs and addresses Arch Cons issues
WAP-209-MMSEncapsulation-20010601-p	01-Jun-2001		The final proposed version for Approved voting
WAP-209-MMSEncapsulation-20010601-a	21-Jun-2001		Approved version with changes in disclaimer